

HYPERION GATEWAY PORT EXPANDER

The Hyperion Gateway Port Expander provides a seamless method to extend the number of Hyperion Ports available to connect equipment.

FEATURES


- Expands the number of available wire Hyperion Ports for scalability
- Intelligent port design automatically registers added devices and monitors improper wiring
- Equipped with RS485 for long range communication capabilities across large sites
- Requires no additional power source for Hyperion equipment
- Managed By The Hyperion Application Software



MODEL

HYP-PE4A-B Hyperion Port Expander, 4 Wired Ports, Black

DIMENSIONS

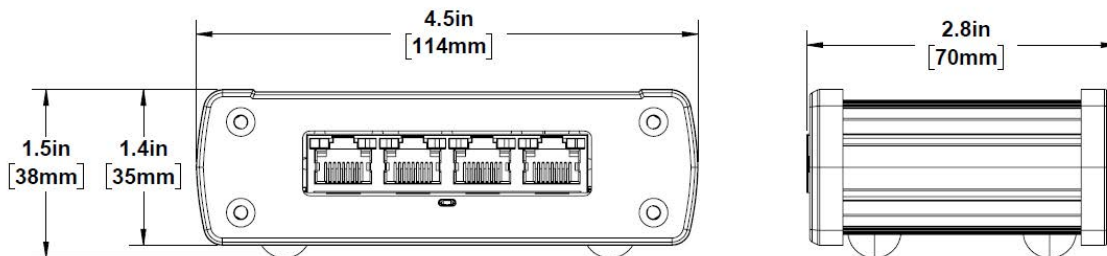

MODEL NUMBER	HYP-PE4A-B
CONSTRUCTION	
Housing	Aluminum
Color	Black
Weight	0.6 lbs
Finish	Powder Coat
GENERAL	
Hyperion I/O	4 Hyperion Device Ports (RJ45)
USB	1 Micro USB
RS485 (Input)	1 (Screw Terminal - 2 position)
RS485 (Output)	1 (Screw Terminal - 2 position)
ELECTRICAL	
Operating Voltage	DC 24V
Power Consumption	6.5A Max. (@DC 24V)
ENVIRONMENTAL	
Environment	Indoor
Operating Temperature	-4°F to 130°F (-30°C to 55°C)
ACCESSORIES	
Power Supply	1
Cabling	1 (USB to Micro USB adapter, 3')
Mounting Bracket	2
Mounting Hardware	Fasteners and Wall Anchors